

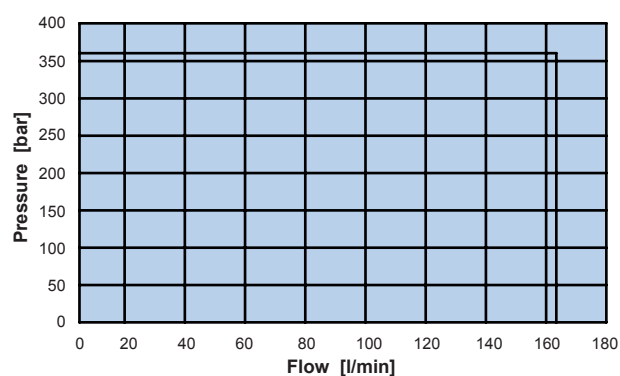
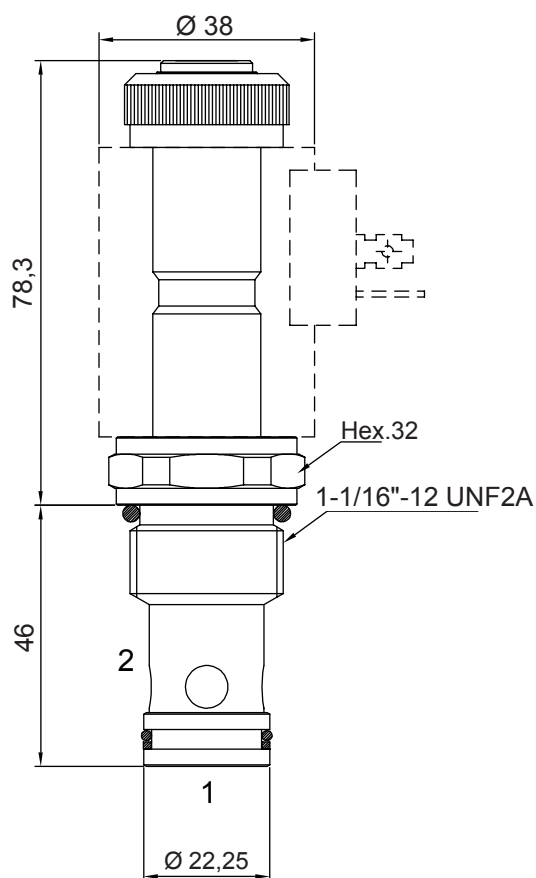


2 WAYS 2 POSITIONS ELECTRIC VALVE, PILOT POPPET OPERATED NC

- Flow **150 l/min**
- Max working pressure **350 bar**
- Leakage **0,25 cc/min**
- Seals **NBR**
- Cavity **C240000**
- Cartridge tightening torque **50 Nm**
- Ring nut tightening torque **5 Nm**
- Weight (with coil). **0,58 Kg**
- Coil **CT-9801** to be ordered separately




75

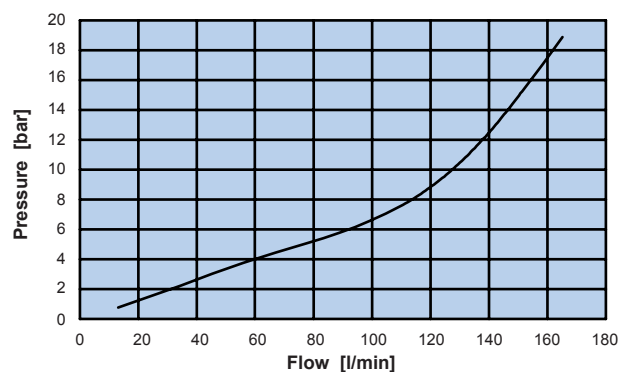

Ordering code

0 5 1 4 1 0 0 0 0





No emergency Unscrew type




COIL - TUBE Ø 19

24 W

- Wire insulation class.H (>185°C)
- ED. 100%
- Coil power at 20° C.24 W
- Ambient temperature -20 +40° C
- Weight. 0,28 Kg



ELECTRIC CIRCUITS




STANDARD

CONNECTOR	PROTECTION CLASS	COIL THERMAL INSULATION CLASS	VOLTAGE [V]	RESISTANCE [Ω]	CIRCUIT	ORDERING CODE
DIN 43650	IP65*	H	12 V dc	6,8	STANDARD	098011190
DIN 43650	IP65*	H	24 V dc	24	STANDARD	098012190
DIN 43650	IP65*	H	26 V dc	27,1	STANDARD	098012191
DIN 43650	IP65*	H	220 V Rac**	1470	STANDARD	098016190

* Protection index with standard connector

** Rectifier not included - Power 25W

STANDARD BODY FOR LINE MOUNTING

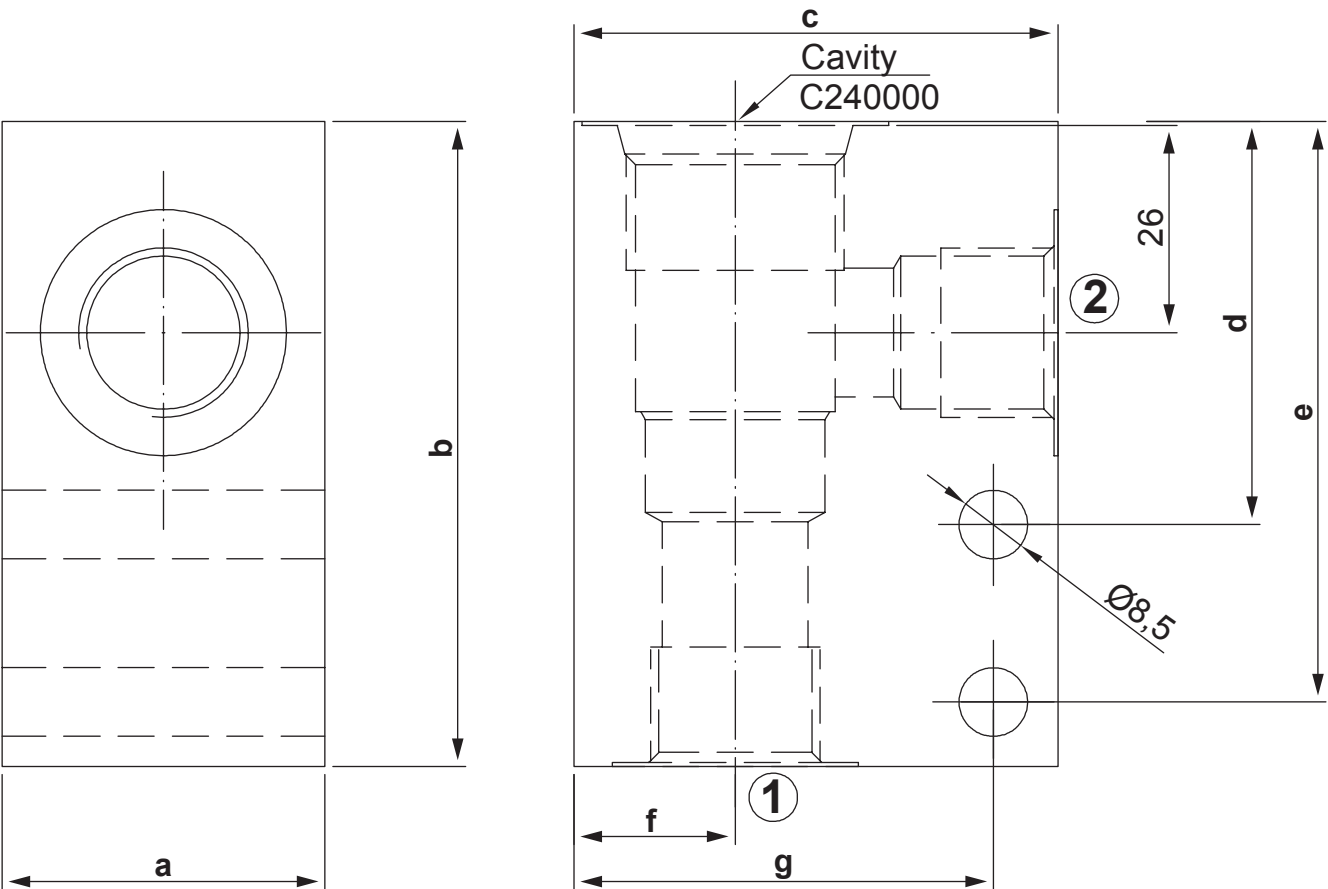

Ordering code

1 7 1 4 0 2 0 0							
PORT SIZE				ALUMINIUM		STEEL	
G1/2 = 3 G3/4 = 4 G1 = 5				0		1	
	a	b	c	d	e	f	g
G1/2 = 3	40	80	60	50	72	20	52
G3/4 = 4	40	80	60	50	72	20	52
G1 = 5	50	85	70	55	77	25	62