
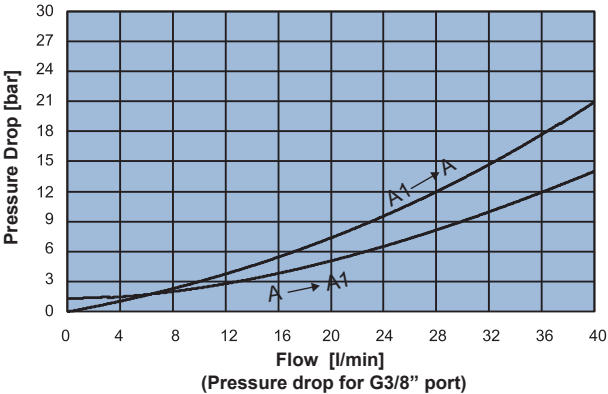
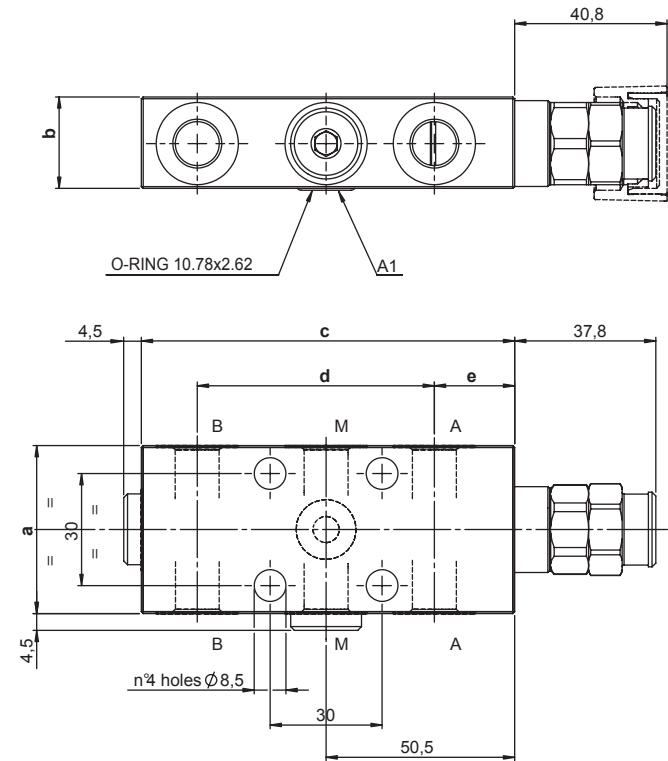


SINGLE ACTING COUNTERBALANCE VALVE FLANGED 30x30

- Flow.....40 l/min
- Max working pressure.....350 bar
- Compensation.....Not Compensated
- Weight G 1/4".....0,8 Kg
- Weight G 3/8".....1 Kg
- Tamper proof cap.....cod. 9021030190



Note:
- Pressure setting must be 30% higher than pressure induced by the load.
- Back pressure can influence the opening pressure (LHD03X-C is recommended for circuits with high back pressure)

	a	b	c	d	e
02	45	24,5	100	63,5	21,5
03	50	29,5	100	66	19,5

Ordering code

H 3 0 0 7 N S 0 0

PILOT RATIO	
40	4:1

SPRINGS	2	3
Setting range min.-max. [bar]	80 - 210	150 - 350
Pressure Increase [bar/turn]	41	100
Standard setting 4 l/min [bar]	200	350

PORTS	02	03
A,B	G 1/4"	G 3/8"
A1	Ø 6	Ø 6
M	G 1/4"	G 1/4"

